


LED STREET LIGHT COMPACT 90 / 110 / 120 WATT

JINGRI LIGHTING
PRODUCT CATALOG
LED STREET LIGHTING




灯具竖直安装, 可调角度为 0~10°
When vertical install LED light, adjust angle is from 0-10°

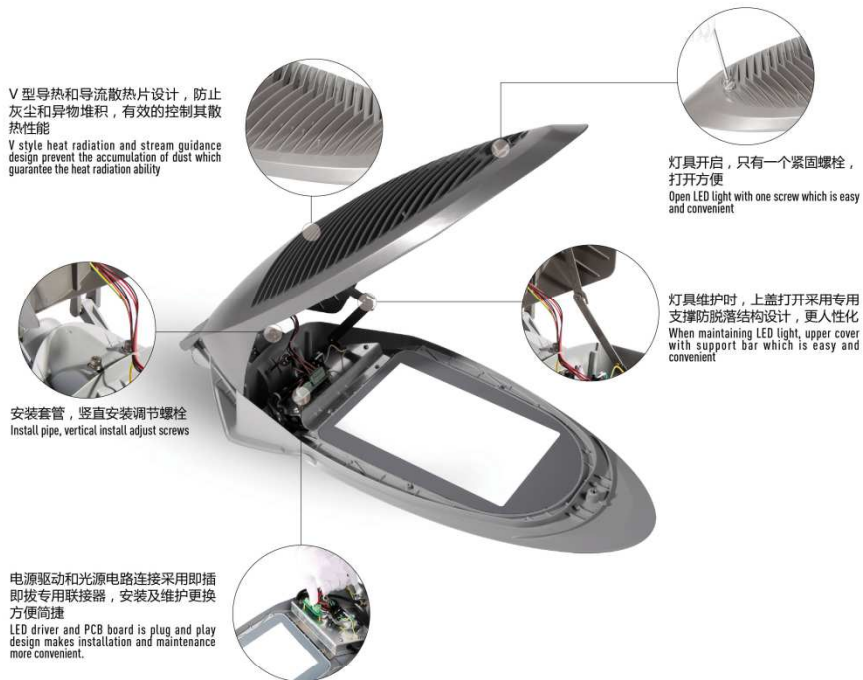


灯具水平安装, 可调角度为 ±5°
When horizontal install LED light, adjust angle is ±5°

JRA2 120/110/90

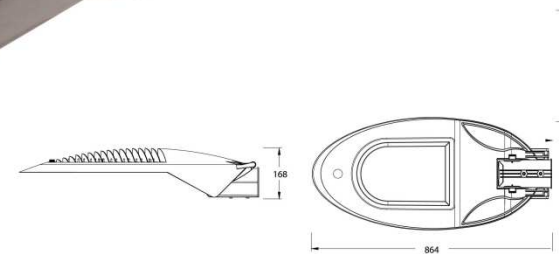

产品尺寸 Product Dimension


JRA2 60/40/30



产品尺寸 Product Dimension

LED STREET LIGHTING

配光曲线图 Light Distribution Curve

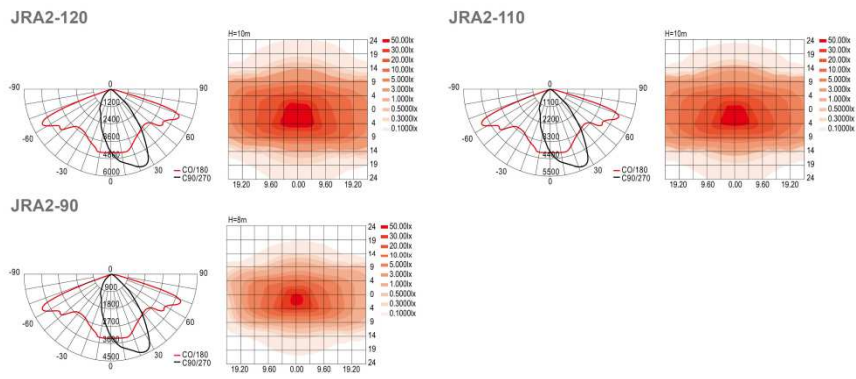

JINGRI LIGHTING
PRODUCT CATALOG
LED STREET LIGHTING


技术参数 Specification

产品型号	Product Code	JRA2-120	JRA2-110	JRA2-90
LED 数量	LED Quantity	112pcs	96pcs	80pcs
额定功率	Rated Power	127W	114W	97W
色温	Color Temperature	6500/4000/3000 K	6500/4000/3000 K	6500/4000/3000 K
光效	Efficiency	116/107/87 lm/W	120/112/89 lm/W	120/110/90 lm/W
初始光通量	Luminous Flux	14610/13530/10960 lm	13530/12530/10150 lm	11650/10790/8740 lm
安装管径	Installation Pipe Diameter	Φ60/76mm	Φ60/76mm	Φ60/76mm
安装高度	Installation Height	10-12m	9-11m	8-10m
重量	Net Weight	10.93kg	10.93kg	10.62kg
毛重	Gross Weight	12.93kg	12.93kg	12.62kg
包装尺寸	Packing Size	1005*433*245mm	1005*433*245mm	1005*433*245mm

产品型号	Product Code	JRA2-120/112*1.6W	JRA2-110/96*1.6W	JRA2-90/80*1.6W
LED 数量	LED Quantity	112pcs	96pcs	80pcs
额定功率	Rated Power	172W	143W	138W
色温	Color Temperature	6500/4000/3000 K	6500/4000/3000 K	6500/4000/3000 K
光效	Efficiency	112/103/83 lm/W	117/108/88 lm/W	117/103/83 lm/W
初始光通量	Luminous Flux	19080/17670/14310 lm	16720/15490/112540 lm	15320/14190/11490 lm
安装管径	Installation Pipe Diameter	Φ60/76mm	Φ60/76mm	Φ60/76mm
安装高度	Installation Height	10-12m	9-11m	8-10m
重量	Net Weight	10.93kg	10.93kg	10.62kg
毛重	Gross Weight	12.93kg	12.93kg	12.62kg
包装尺寸	Packing Size	1005*433*245mm	1005*433*245mm	1005*433*245mm

注：包装尺寸为外尺寸
 本表所示技术参数均在环境温度 25℃，湿度 35% 的实验室 1 环境中测得。
 ① 浙江晶日照明科技有限公司为浙江省高新技术企业研究中心
 Packing size is outer size of box
 All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment
 Zhejiang JR lighting technology company is provincial level research center

配光曲线图 Light Distribution Curve

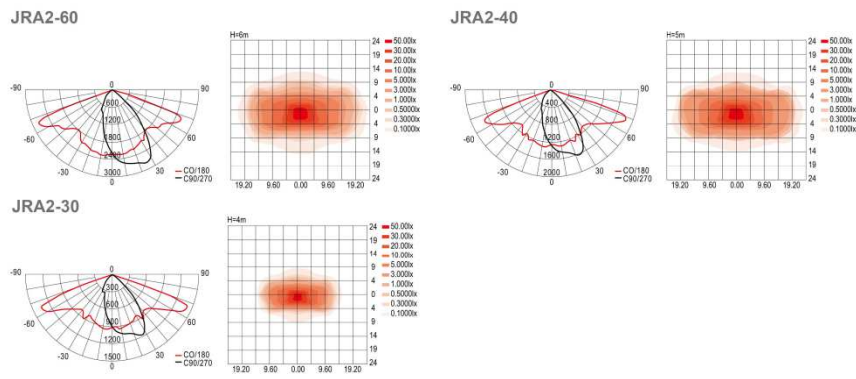

LED STREET LIGHTING

技术参数 Specification

产品型号	Product Code	JRA2-60	JRA2-40	JRA2-30
LED 数量	LED Quantity	54pcs	32pcs	24pcs
额定功率	Rated Power	61W	37W	31W
色温	Color Temperature	6500/4000/3000 K	6500/4000/3000 K	6500/4000/3000 K
光效	Efficiency	118/109/89 lm/W	111/103/83 lm/W	107/98/81 lm/W
初始光通量	Luminous Flux	7160/6430/5370 lm	4070/3760/3050 lm	3330/3080/2500 lm
安装管径	Installation Pipe Diameter	Φ48/60mm	Φ48/60mm	Φ48/60mm
安装高度	Installation Height	6-8m	5-7m	4-6m
重量	Lamp Weight	5.93kg	5.6kg	5.6kg
毛重	Gross	7.08kg	6.75kg	6.75kg
包装尺寸	Packing Size	721*371*195mm	721*371*195mm	721*371*195mm

产品型号	Product Code	JRA2-60/54*1.6W	JRA2-40/32*1.6W	JRA2-30/24*1.6W
LED 数量	LED Quantity	54pcs	32pcs	24pcs
额定功率	Rated Power	82W	55W	37W
色温	Color Temperature	6500/4000/3000 K	6500/4000/3000 K	6500/4000/3000 K
光效	Efficiency	113/105/85 lm/W	106/98/79 lm/W	102/95/77 lm/W
初始光通量	Luminous Flux	9340/8450/7000 lm	5800/5380/4350 lm	3810/3530/2860 lm
安装管径	Installation Pipe Diameter	Φ48/60mm	Φ48/60mm	Φ48/60mm
安装高度	Installation Height	6-8m	5-7m	4-6m
重量	Lamp Weight	5.93kg	5.6kg	5.6kg
毛重	Gross	7.08kg	6.75kg	6.75kg
包装尺寸	Packing Size	721*371*195mm	721*371*195mm	721*371*195mm

注：包装尺寸为外尺寸
 本表所示技术参数均在环境温度 25℃，湿度 35% 的实验室 1 环境中测得。
 ① 浙江晶日照明科技有限公司为浙江省高新技术企业研究中心
 Packing size is outer size of box
 All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment
 Zhejiang JR lighting technology company is provincial level research center